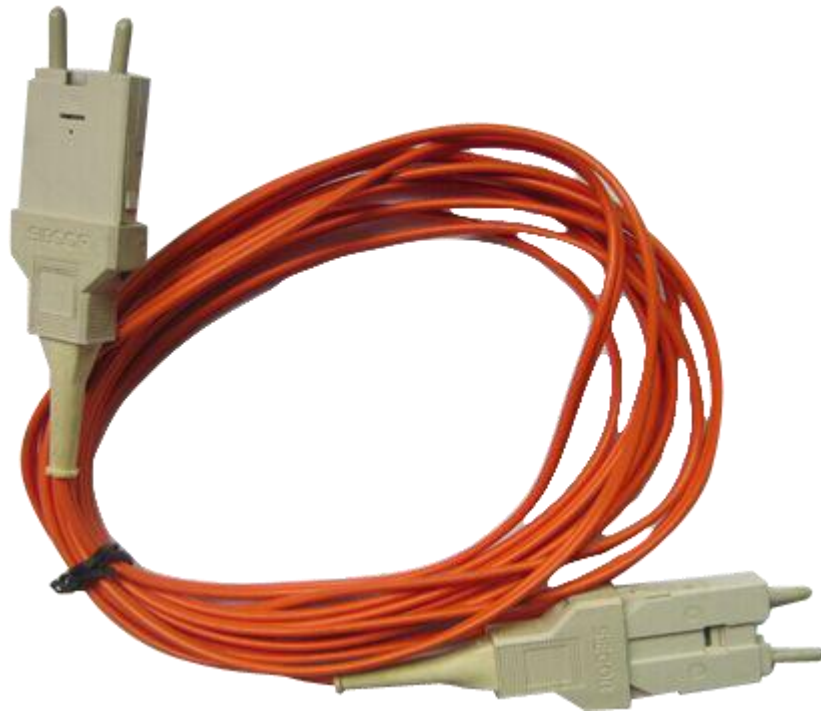


FDDI Duplex Patch Cord**JFOPC-1414M**

For detailed inquiry
please contact our
sales team at:

market@jfopt.com

● Characteristics

- ◆ Compliant with TIA/EIA 568A and RoHS standard
- ◆ Low insertion loss and high return loss
- ◆ Excellent interchangeability
- ◆ Durable parts
- ◆ Resistance of high temperature

● Application

- ◆ Telecom
- ◆ Optical fiber test equipment
- ◆ Optical communication equipment
- ◆ TV system
- ◆ Metro
- ◆ Fiber optical data processor

● Specification

- ◆ End face: PC, UPC
- ◆ Fiber type: Multimode ITU-TG.651
- ◆ Standard accessories, Ceramic ferrule
- ◆ Cable diameter: 3.0mm or 2.0*4.1 mm
- ◆ Optical fiber: 62.5/125 μ m (OM1), 50/125 μ m (OM2, OM3, OM4)
- ◆ Insertion Loss ≤ 0.4 dB
- ◆ Return Loss PC ≥ 20 dB
- ◆ Interchange ability: ≤ 0.2 dB
- ◆ Repeatability: ≤ 0.1 dB
- ◆ Operating Temperature: $-20^{\circ}\text{c} \sim 70^{\circ}\text{c}$
- ◆ Storage Temperature: $-40^{\circ}\text{c} \sim 80^{\circ}\text{c}$
- ◆ Tensile strength: 100N (short-term)
- ◆ Minimum bending radius (mm): dynamic 20D, static 10D
- ◆ Optical cable jacket PVC or LSZH. Other material can be customized.