



Fiber Optical Patch Cord, MTRJ-LC, Duplex

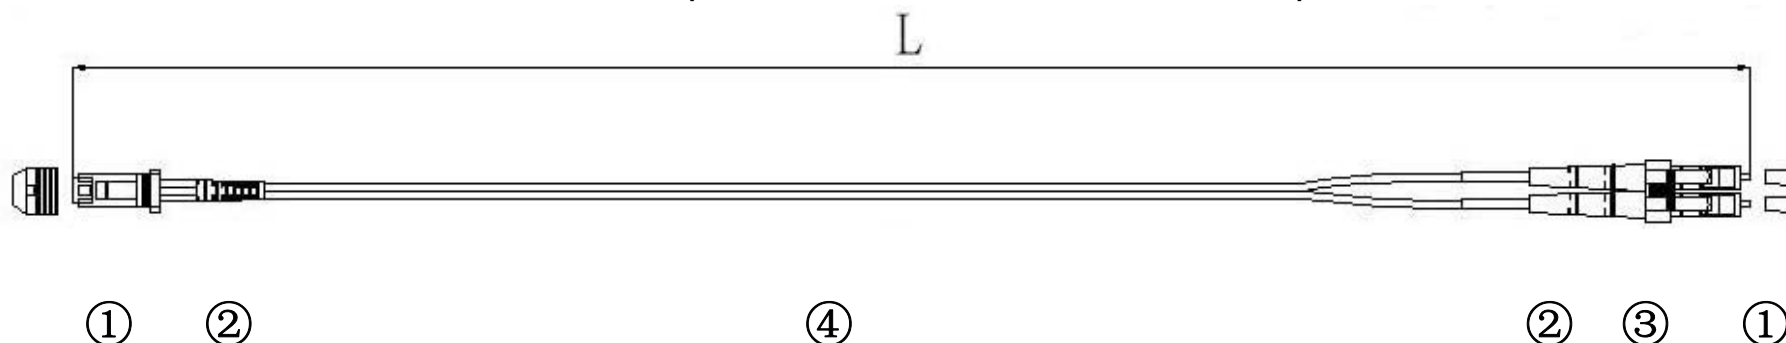

**Features**

- LC PC, UPC or APC polishing
- Single mode fiber: ITU- T G.652, or G655, or G657
- Multi mode fiber, ITU-TG.651
- Standard housing, MTRJ plastic ferrule, LC ceramic ferrule
- Cable diameter: 1.8×3.7 (mm) or customized
- Fiber type: 9/125 μm (OS1), or 62.5/125μm (OM1), or 50/125μm (OM2, OM3)
- Insertion loss: MTRJ Less than 0.5dB, LC Less than 0.3dB
- Return loss: LC/UPC SM larger than 50dB
  - LC/PC SM larger than 45 dB; MTRJ: PC SM larger than 40 dB.
  - LC/APC SM larger than 60 dB
  - PC MM larger than 20 dB
- Repeatability: Less than 0.2 dB
- Changeability: Less than 0.1 dB
- Operating temperature range: -20°C ~ 70°C
- Storage temperature range: -40°C ~ 80°C
- Color of the jacket: SM yellow, OM1, OM1 orange, OM3 aqua, or customized
- Material of the jacket: PVC or LSZH or customized

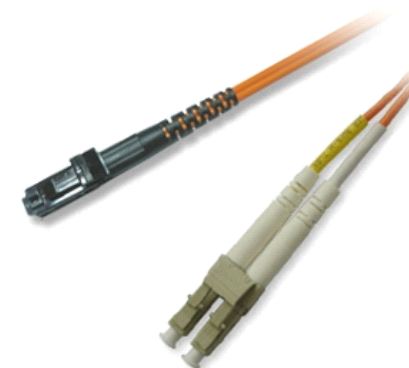

No.	Description	Qty
①	Dust Cap	3
②	Connector	3
③	Clip	1
④	Optical Cable	1

**For detailed inquiry please contact our sales team at [market@jfopt.com](mailto:market@jfopt.com)**