


Fiber Optical Patch Cord, MTRJ-ST, Duplex



Features

- ST PC, UPC or APC polishing
- Single mode fiber: ITU- T G.652, or G655, or G657
- Multi monde fiber, ITU-TG.651
- Standard housing, MTRJ plastic ferrule, ST ceramic ferrule
- Cable diameter: 1.8×3.7 (mm) or customized
- Fiber type: 9/125 μm (OS1), or 62.5/125μm (OM1), or 50/125μm (OM2, OM3)
- Insertion loss: ST: Less than 0.3dB MTRJ: Less than 0.5dB
- Return loss: ST/UPC SM larger than 50dB
 - ST/PC SM larger than 45 dB; MTRJ: PC SM larger than 40 dB.
 - ST/APC SM larger than 60 dB
 - PC MM larger than 20 dB
- Repeatability: Less than 0.2 dB
- Changeability: Less than 0.1 dB
- Operating temperature range: -20°c ~ 70°c
- Storage temperature range: -40°c ~ 80°c
- Color of the jacket: SM yellow, OM1, OM1 orange, OM3 aqua, or customized
- Material of the jacket: PVC or LSZH or customized

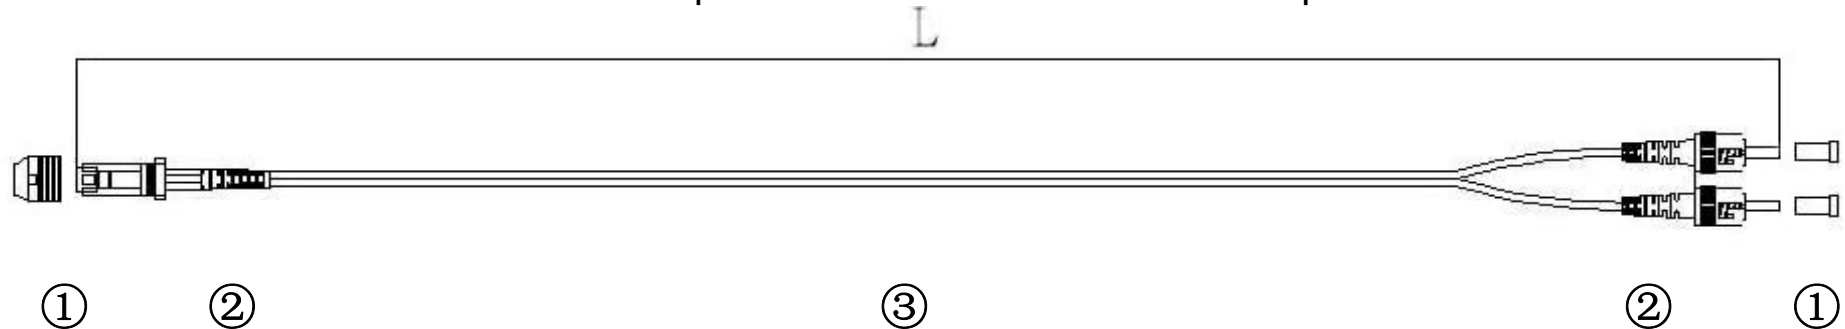

No.	Description	Qty
①	Dust Cap	3
②	Connector	3
③	Optical Cable	1

For detailed inquiry please contact our sales team at market@jfopt.com

Shenzhen Jiafu Optical Communication Co., Ltd

Add: 2nd Floor, Building A, Huilongda Industrial Park, Shuitian Community, Shiyan Street, Bao'an District, Shenzhen City, Guangdong Province, China

Tel: 86-755-8357 0641 & 86-755-8357 0652 Fax: 86-755-8357 0649