



SC Simplex Fiber Optical Pigtail

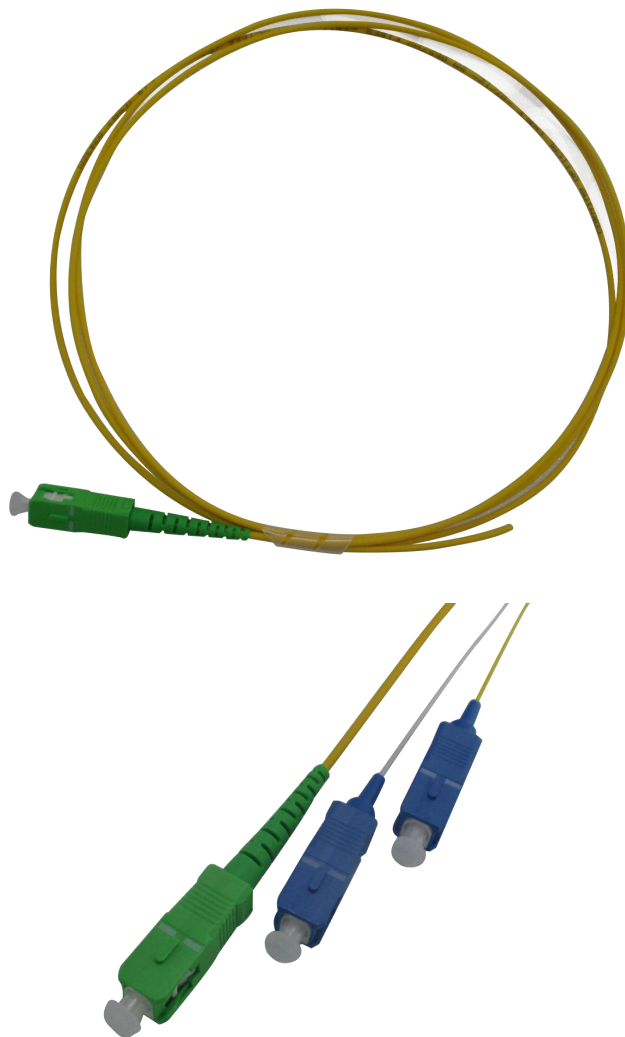

For detailed inquiry
please contact our
sales team at:
market@jfopt.com

MODEL : SC Simplex



● Features :

- ◆ **PC, UPC or APC polishing**
- ◆ **Single mode fiber: ITU- T G.652, or G655, or G657**
- ◆ **Multi monde fiber, ITU-TG.651**
- ◆ **Standard housing, ceramic ferrule**
- ◆ **Cable diameter: 0.9mm, 2.0mm, 3.0mm or customized**
- ◆ **Fiber type: 9/125 μm (OS1), or 62.5/125μm (OM1), or 50/125μm (OM2, OM3,OM4)**
- ◆ **Insertion loss: Less than 0.3dB**
- ◆ **Return loss: UPC SM larger than 50dB**
- ◆ **APC SM larger than 60 dB**
- ◆ **PC MM larger than 20 dB**
- ◆ **Repeatability: Less than 0.2 dB**
- ◆ **Changeability: Less than 0.1 dB**
- ◆ **Operating temperature range: -20°c ~ 70°c**
- ◆ **Storage temperature range: -40°c ~ 80°c**
- ◆ **Tensile strength of the connector: 10N**
- ◆ **Min. bending radius: 35mm (G.652), 15mm (G657A)**
- ◆ **Color of the jacket: SM yellow, OM1, OM2 orange, OM3 aqua, or customized**
- ◆ **Material of the jacket: PVC or LSZH or customized**