



## **Fiber Optical Patch Cord, SC-SC, Simplex**

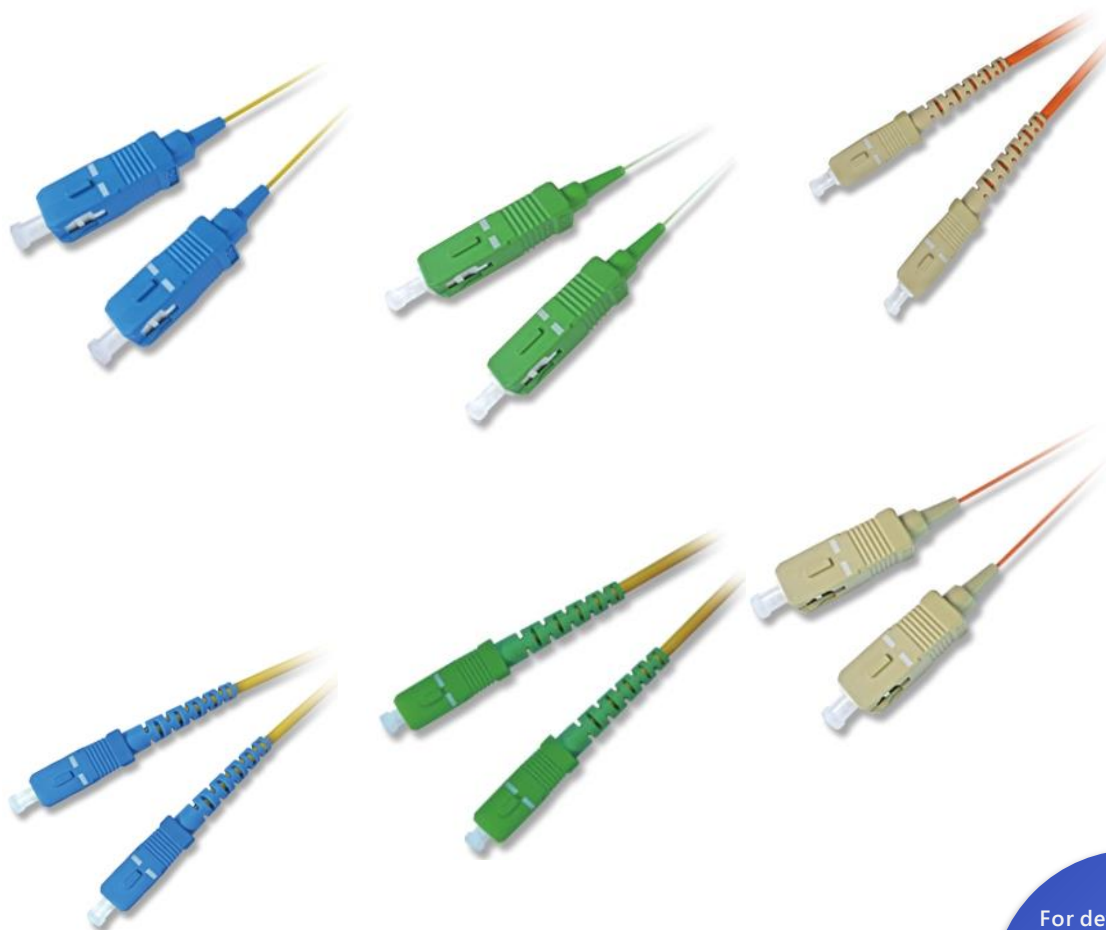

For detailed inquiry  
please contact our  
sales team at:

[market@jfopt.com](mailto:market@jfopt.com)



### ● Features

- ◆ **PC, UPC or APC polishing**
- ◆ **Single mode fiber: ITU- T G.652, or G655, or G657**
- ◆ **Multi monde fiber, ITU-TG.651**
- ◆ **Standard housing, ceramic ferrule**
- ◆ **Cable diameter: 0.9mm, 2.0mm, 3.0mm or customized**
- ◆ **Fiber type: 9/125  $\mu$ m (OS1), or 62.5/125 $\mu$ m (OM1), or 50/125 $\mu$ m (OM2, OM3,OM4)**
- ◆ **Insertion loss: Less than 0.3dB**
- ◆ **Return loss: UPC SM larger than 50dB**
  - APC SM larger than 60 dB**
  - PC MM larger than 20 dB**
- ◆ **Repeatability: Less than 0.2 dB**
- ◆ **Changeability: Less than 0.1 dB**
- ◆ **Operating temperature range: -20 $^{\circ}$ c ~ 70 $^{\circ}$ c**
- ◆ **Storage temperature range: -40 $^{\circ}$ c ~ 80 $^{\circ}$ c**
- ◆ **Color of the jacket: SM yellow, OM1, OM2 orange, OM3 aqua, or customized**
- ◆ **Material of the jacket: PVC or LSZH or customized**