


JFOPT[®]

www.jfopt.com

Technical Specification


Fiber Optical Patch Cord, ST-FC, Simplex

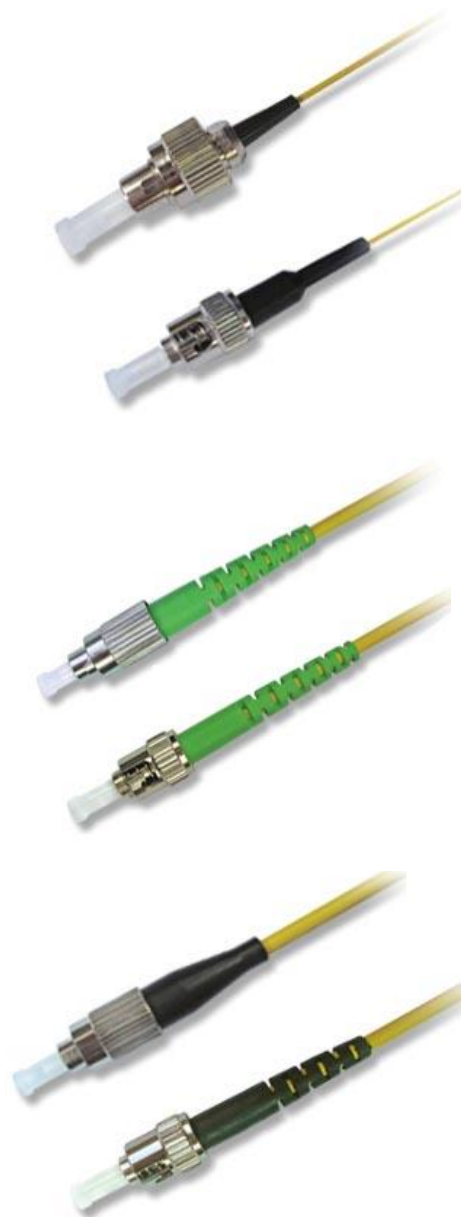

For detailed inquiry
please contact our
sales team at:

market@jfopt.com

Shenzhen Jiafu Optical Communication Co., Ltd
Add: 2nd Floor, Building A, Huilongda Industrial Park, Shuitian Community,
Shiyan Street, Bao'an District, Shenzhen City, Guangdong Province, China
Tel: 86-755-83570641 & 86-755-83570652 Fax: 86-755-83570649



● Features

- ◆ **PC, UPC or APC polishing**
- ◆ **Single mode fiber: ITU- T G.652, or G655, or G657**
- ◆ **Multi monde fiber, ITU-TG.651**
- ◆ **Standard housing, ceramic ferrule**
- ◆ **Cable diameter: 0.9mm, 2.0mm, 3.0mm or customized**
- ◆ **Fiber type: 9/125 μm (OS1), or 62.5/125 μm (OM1), or 50/125 μm (OM2, OM3,OM4)**
- ◆ **Insertion loss: Less than 0.3dB**
- ◆ **Return loss: UPC SM larger than 50dB**
APC SM larger than 60 dB
PC MM larger than 20 dB
- ◆ **Repeatability: Less than 0.2 dB**
- ◆ **Changeability: Less than 0.1 dB**
- ◆ **Operating temperature range: -20 $^{\circ}\text{c}$ ~ 70 $^{\circ}\text{c}$**
- ◆ **Storage temperature range: -40 $^{\circ}\text{c}$ ~ 80 $^{\circ}\text{c}$**
- ◆ **Color of the jacket: SM yellow, OM1, OM2 orange, OM3 aqua, or customized**
- ◆ **Material of the jacket: PVC or LSZH or customized**